

DP-650A Series - Snap-in

Large, low-cost 3 1/2 Digit LCD Display Digital Panel Meters



Features

- Low-cost, high-performance replacement for many OEM DPMs
- Snap-in bezel mount eliminates mounting hardware
- Low power: 2.5mA (+5V)
- Space-saving design: only 1" (25 mm) deep
- Occupies less than 2.5 X 1.1 inches of front panel space
- 3 1/2 digits with high-contrast LCD Display
- Optional loop powered 4 to 20mA process inputs (DP-660) available

Specifications

Display:	Digits:	3 1/2 digits (± 1999 counts)
	Type:	0.5" (12mm) high-contrast reflective LCD
	Polarity:	Automatic, "-" displayed
	Decimal Points:	3 position, user selectable
	Overload:	Three lower order digits blank for inputs >1999 & <-1999
	Hold:	Available OEM option, contact factory
Inputs:	Ranges:	$\pm 200.0\text{mV}$, $\pm 2.000\text{V}$, $\pm 20.00\text{V DC}$
	Configuration:	Bipolar & Differential
	Protection:	$\pm 350\text{V DC}$, ($\pm 100\text{V DC}$ on 200mV range)
	Impedance:	$>10\text{ M}\Omega$, ($>1\text{ M}\Omega$ on 20V range)
Performance:	Accuracy:	$\pm(0.1\% + 1\text{ count})$ typical $\pm(0.1\% + 2\text{ counts})$ maximum
	Conversion Rate:	2.5 per second
	Normal Mode Rejection:	$>30\text{ db @ }60\text{ Hz}$
	Common Mode Range:	$\pm 1\text{V DC}$
	Common Mode Rej.:	$>86\text{ dB}$
	Zero Adjustment:	Automatic
	Warmup:	10 minutes typical
	Temperature Coeff.:	$\pm 100\text{ ppm per }^\circ\text{C}$ typical
Environment:	Operating Range:	0 to 50 $^\circ\text{C}$
	Storage Range:	-20 to 70 $^\circ\text{C}$
Power Supply:	5V powered DPM:	+5V DC ($\pm 5\%$) at 2.5 mA
Mounting:	Snap-In Bezel Mount	
Connection:	13 pins, 0.025" square on 0.1" centers - pin 3 missing	



Ordering Information

Model	Description
DP-650A	3 1/2 digit LCD, $\pm 200\text{mV}$ input
DP-652A	3 1/2 digit LCD, $\pm 2\text{V}$ input
DP-654A	3 1/2 digit LCD, $\pm 20\text{V}$ input
C13	13 Pin Connector / Wire Assembly
APS-5	120V AC to 5V DC Power Supply

DP-650A Series - Snap-in

Dimensions

BEZEL MOUNT DIMENSIONS

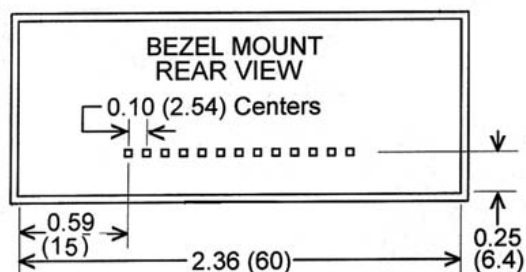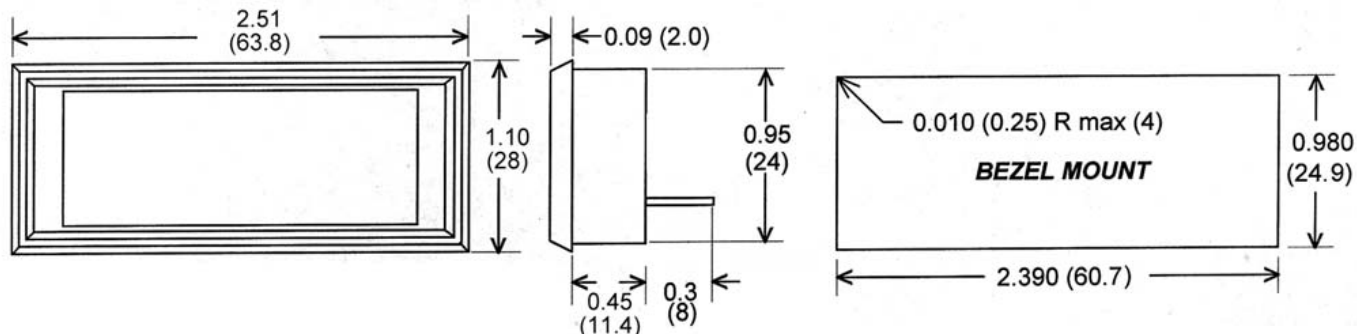

INCHES (mm)

Connections

Pin No.	Pin Name	Description
1	V+	+5V power supply
2	V-	Internal Negative Supply Output
3	NC	No pin
4	TST	Power Supply Ground
5	COM	Analog Common
6	INLO	Negative input signal
7	INH1	Positive input signal
8	RFL	Negative reference input
9	RFH	Positive reference input
10	ROH	Internal reference output
11	D3	1.XXX decimal point
12	D2	1X.XX decimal point
13	D1	1XX.X decimal point